


## A SOLUTION FOR:


## CONTINUOUS PROCESSING



## MERROW 70-D3B-2 HP SPECIFICATIONS

OPERATING SPEED:	2250 rpm
STANDARD STITCH ECCENTRIC :	6 spi
STITCH ECCENTRIC RANGE :	4-12 spi
STANDARD NEEDLE :	8SDT
NEEDLE RANGE:	3SDT - 8SDT
STITCH TYPE	501
STITCH WIDTH :	5/8" (16mm)
NUMBER OF THREADS	1






70-D3B-2 HP

BUTTED SEAM MACHINE

For the Joining of High Pile/Thick Material End-to-End

- Sews Thick Woven and Non-Woven Material
- Sews Material Up To 2" Thick
- Single Thread Machine With Cutters
- Table or Railway Mountable

- 10 Year Warranty
- Designed and Engineered in the U.S.A.
- Parts and Service Available in 65 Countries
- For More Information Visit www.merrow.com

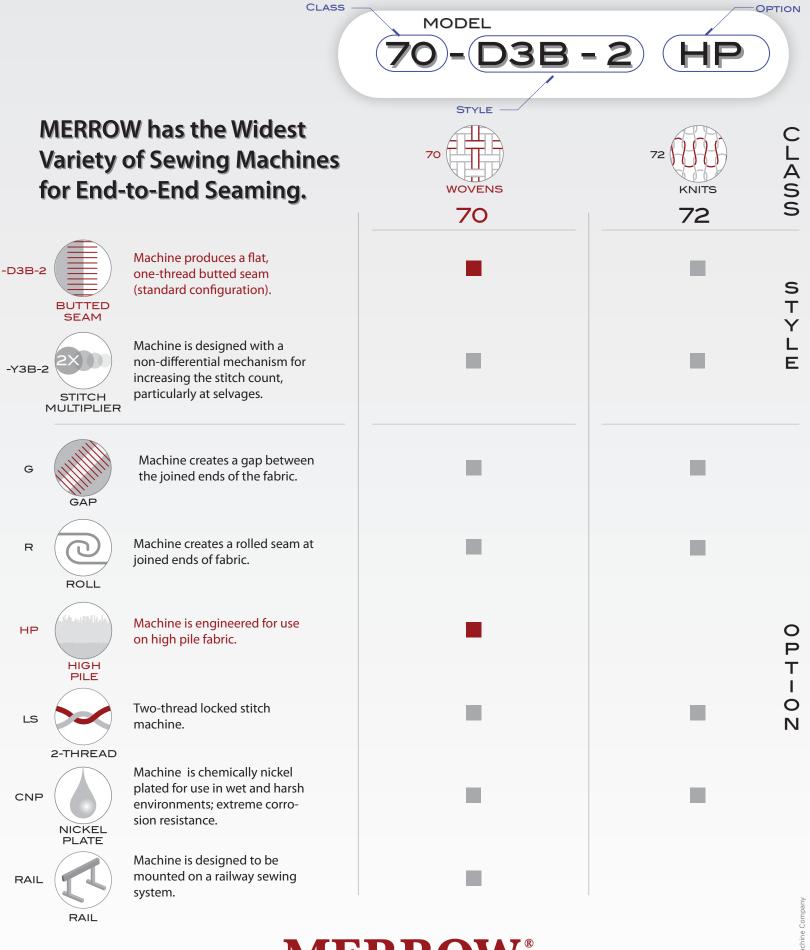

502 BEDFORD STREET FALL RIVER, MA 02720 USA 1001 800.431.6677 WWW.MERROW.COM

SEWING MACHINE COMPANY

Denotes Styles/Options that are INCLUDED on this Model

Denotes Styles/Options that are AVAILABLE for each Machine Class