
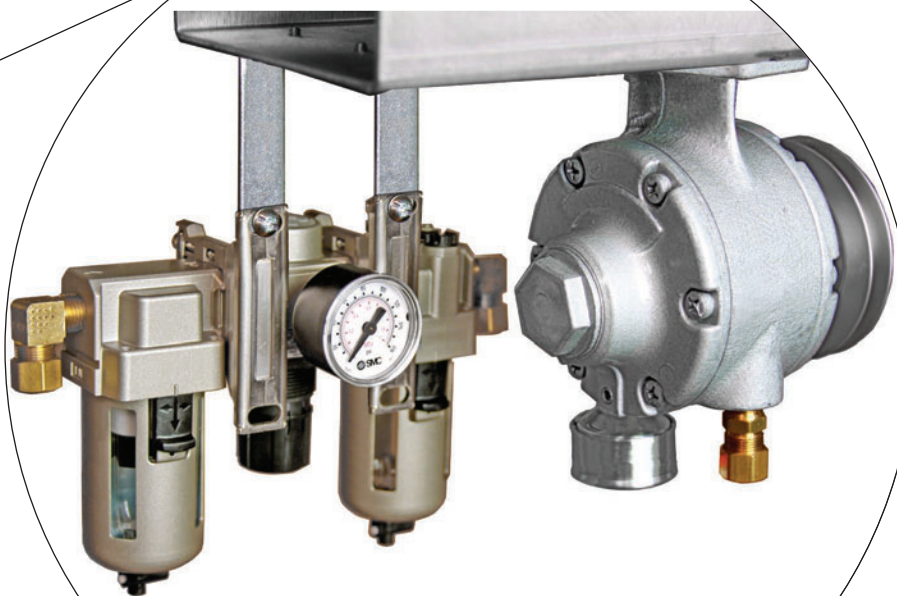


MERROW®

SEWING MACHINE COMPANY

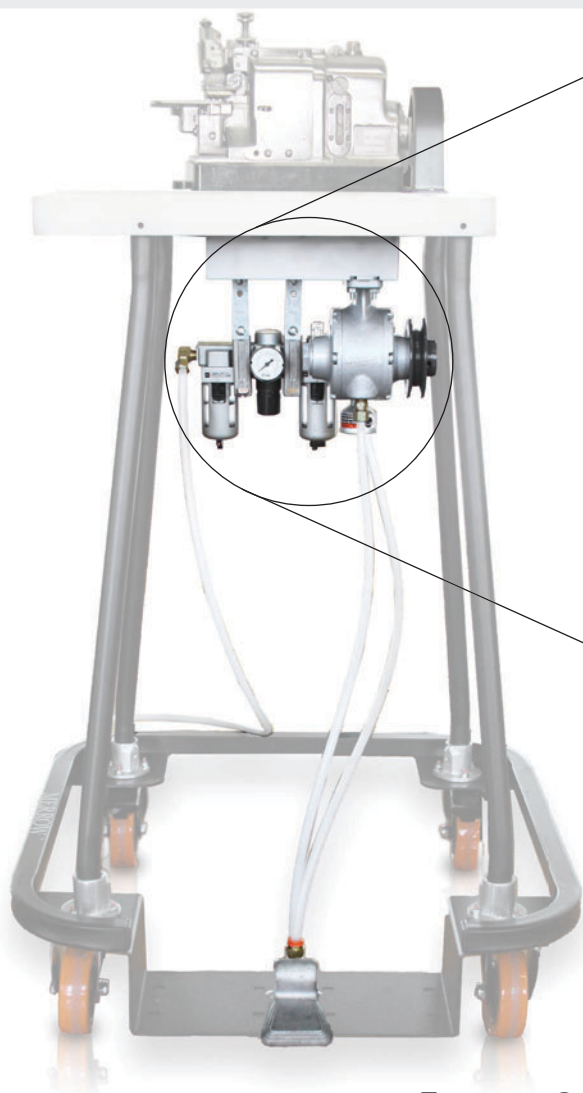

MERROW INDUSTRIAL AIR MOTOR

MOTOR TYPE :	4-Vane Rotary
OUTPUT:	1.7 hp
TORQUE :	36 lbs/in
MAX. SPEED :	4000 rpm
MAX. AIR CONSUMPTION:	78 cfm
DIMENSIONS:	12"l x 7"w x 10.5"h
WEIGHT:	13 lbs



SUITABLE
FOR WET
ENVIRONMENTS

TABLE AND SEWING MACHINE
NOT INCLUDED

INDUSTRIAL AIR MOTOR FOR WET PROCESSING & FINISHING

- SAFE FOR WET PROCESSES •
- QUIET •
- HALF THE WEIGHT OF STANDARD CLUTCH AND SERVO MOTORS •
- STANDARD UNDER TABLE MOUNT •

MERROW

INDUSTRIAL AIR MOTOR

	Industrial Application	Standard Under Table mount	Treadle Operated, Adjustable Speed	Safe for Wet Environments & Applications	Safe for Dusty, Or Fiber Laden Environments	Self Cooling
MERROW INDUSTRIAL AIR MOTOR	■	■	■	■	■	■
STANDARD ELECTRIC MOTOR	■	■	■			

SHIPS WITH ALL NECESSARY MOUNTING HARDWARE. NO MOTOR ASSEMBLY IS REQUIRED

STANDARD COUPLINGS WITH 1/4" PIPE THREAD ACCEPTS 3/8" X 1/4" AIR HOSE (INCLUDED)

EXTREMELY DURABLE AND LIGHTWEIGHT MATERIALS FOR MAXIMUM CORROSION RESISTANCE AND PORTABILITY

STANDARD SIZE MOTOR PULLEY

SMOOTH OPERATING, LOW VIBRATION FOUR VANE MOTOR TAKES UP ITS OWN WEAR AND WILL NOT SPARK

12"

7.5"

10.5"

MERROW[®]
SEWING MACHINE COMPANY

502 BEDFORD STREET
FALL RIVER, MA 02720 USA
1001 800.431.6677
WWW.MERROW.COM